

AD3 Outdoor Series

Outdoor Aluminium Mini Medium Speed Dome Camera




MAIN FEATURES

Mini and Compact Medium Speed Dome
Die Cast Aluminium
IP 66 environmental protection
10x Optical Zoom
360° continuous pan
Pan Speed 0.1°~ 60°/s, Tilt Speed 0.1°~ 60°/s
Preset speed 80°/s
64 presets
6 cruise tracks




AD3 Outdoor Series Mini Medium Speed Dome Camera is certified with IP66 grade of environmental protection, and constructed with Die Cast Aluminum material. It provides 6 cruise tracks with 360 degree of endless pan, for wide area continuous surveillance purpose.

AD3 has built in 1/3" CCD day and night camera, with 10X optical zoom (f=5.5 mm (wide) to 55 mm (tele)), for enhanced surveillance operation.

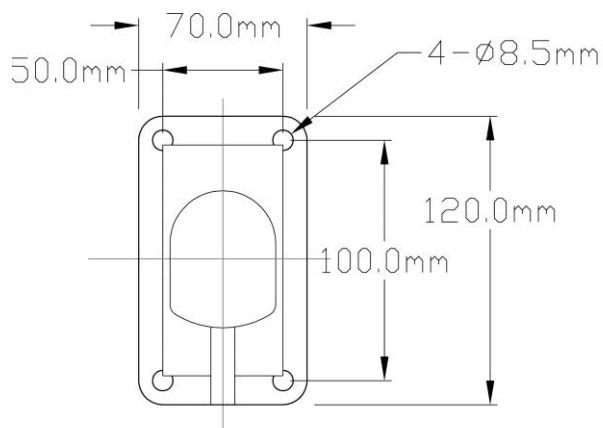

Wall Mounting Dimensions

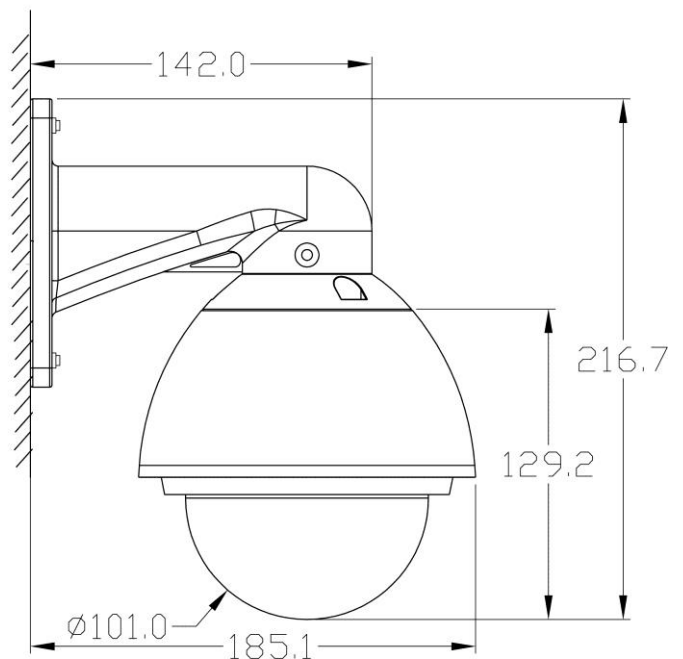

Outline Dimensions

AD3 Outdoor Series

Outdoor Aluminium Mini Medium Speed Dome Camera



TECHNICAL DATA

GENERAL

Ingress Protection IP66

Operating Temperature 0°C to 50°C

Relative Humidity 90%

MECHANICAL

Die Cast Aluminium

Overall dimension (WxHxD): 144x217x186mm (with wall bracket)

1.1kg weight

Pan Speed 0.1°~ 60°/s, Tilt Speed 0.1°~ 60°/s

Preset Speed 80°/s

Pan range 360° Continuously

Tilt range 0°~ 90° (auto flip 180°)

ELECTRICAL

Operating Voltage : AC24V 50/60Hz

Power consumption : 10W

CAMERA

1/3" Sony Super HAD CCD

Horizontal Resolution : 480 TVL

10x Optical Zoom (f=5.5 mm (wide) to 55 mm (tele))

Day/Night Function : Auto (Color)/Black & White/Neg.Art

Day Mode : 1 Lux; Night Mode : 0.1 Lux

Focus : Auto/Manual

White Balance : Auto/Indoor/Outdoor/Manual

AE Control : Auto/Manual

Back Light Compensation : On/Off

PAL or NTSC (please specify)

TELEMETRY RECEIVER & CONTROL

RS-485 connection

2400/4800/9600/19200 bps Baud Rate

Pelco D and Pelco P (Please specify. Other protocols based on request.)

6 cruise tracks

64 preset (max)

STANDARD FITTED

Wall mount bracket

OPTIONAL ACCESSORIES

DPSB110, power supply box 110VAC/24VAC

DPSB230, power supply box 230VAC/24VAC